

CUSTOMIZABLE SOLUTIONS



ALL THE ADVANTAGES OF A HIGHLY VERSATILE SYSTEM

Off-the-shelf customizable dashboards, displays and ECUs are increasingly popular in today's market. They help to reduce research and development costs and timelines for new products.

They also allow significant economies of scale thanks to the use of the same hardware for different platforms, and to the software that can be customized for every single application.

100% MADE IN ITALY

The development and production of all the electronic devices by MTA are entirely carried out in MTA Rolo, a company-owned Italian facility working with forefront modelling, simulation and graphic generation systems.

The whole manufacturing area is an Electrostatic Protected Area (EPA) and is equipped with special devices that prevent electrostatic charge build-up on people. The plant is accredited according to the most stringent regulations in the automotive world.



CARS



TRACTORS



OFF-HIGHWAY
VEHICLES



MOTORCYCLES



TRUCKS

TO EACH, HIS OWN PRODUCT

The OTS dashboards and displays have hardware and software architectures that are very similar, but have a range of looks, sizes, numbers of LEDs, inputs and outputs, as well as different screen types to meet all the needs of the agricultural and off-highway world.

Round, square, rectangular, oval or ovalized, the dashboard and display shapes meet today's OEM demands, with dimensions ranging from extremely small (107 mm outer diameter) to the high-end 310 x 215 mm display.

State-of-the-art components, advanced treatments and materials guarantee high resistance to temperatures and vibrations, as well as an IP66 or IP67 degree of protection.

Most of these products can feature both a 12 V and a 24 V power supply.



READY TO "GO ELECTRIC"

In recent years, electric vehicles boom continues to heat up and the displays and the dashboards have to change accordingly. They have to retain the partial display of the original traditional vehicle and show a number of different indicators specific for EVs.

The customization facility of our OTS Dashboards and Displays range, provides the easiest and quickest solution to this need, transforming a "normal" instrument panel in a panel for purely electric vehicles.

DASHBOARDS



SPOT



QUIK



QUIK PLUS



SMART



TELLUS



REVO PLUS



IDEA

DISPLAYS



ZIP



GIOTTO



LEONARDO

ELECTRONIC CONTROL UNITS



DYNA



ACTUA



Create an account to download all the technical data sheets on www.mta.it/en/resources



SPOT

- Customizable dial plate, front bezel and internal mask
- Dimensions: Ø 100 mm, external frame Ø 107 mm
- 3.1" dot matrix LCD 160 x 56 pixel
- 18 telltales
- Antifog treatment
- Power supply: 12 Vdc
- Protection degree: IP6K9K front, IP65 rear
- 20 inputs, 1 output (optional)
- 1 CAN bus interface
- RTC (optional), buzzer
- Connector: Tyco Superseal 26 pins

Customizable with
MTASTUDIO

Simulable with
**MTACORE
SIMULATOR**

QUIK & QUIK PLUS

- Customizable dial plate, front bezel and internal mask
- Dimensions: 230 x 120 x 60 mm
- Antifog treatment
- Power supply: 12 Vdc (9-16 Vdc) and 24 Vdc (18-32 Vdc)
- Protection degree: IP66 front, IP65 rear
- 27 inputs, 1 output (optional) and 1 Vref 5 Vdc output (optional)
- 1 CAN bus interface
- RTC (optional), buzzer
- Connector: Tyco Superseal 34 pins

QUIK

- 2.2" segment LCD
- 2 analog gauges, 1 LED bar graph and 18 telltales + 5 optional



QUIK PLUS

- 2.7" dot matrix LCD 128 x 128 pixel
- 2 analog gauges and 19 telltales

Customizable with
MTASTUDIO

Simulable with
**MTACORE
SIMULATOR**

SMART

- Dimensions: 162 x 97 x 41.3 mm
- 4.3" color TFT LCD 480 x 272 pixel with optical bonding
- Front glass with integrated telltales
- 10 telltales and 1 bar graph with 8 LEDs
- Power supply: 12 Vdc
- Protection degree: IP66
- 12 inputs, 6 power outputs and 1 H-bridge
- 1 CAN bus and 1 LIN interfaces
- RTC, night & day sensor
- Connector: Tyco Superseal 34 pins

Customizable with
MTASTUDIO

Simulable with
**MTACORE
SIMULATOR**



TELLUS

Customizable dial plate, front bezel

Dimensions: 286 x 135 x 63 mm

3.5" color TFT LCD 240 x 320 pixel

2 analog gauges

2 push buttons and 25 telltales

3 LED bar graph + 2 optional

PMMA front lens with antifog

Power supply: 12 Vdc

Protection degree: IP65

36 inputs, 4 outputs

2 CAN bus and 1 LIN interfaces

RTC, buzzer

Connectors: 1 Tyco 26 pins 3 keys

and 1 Tyco 26 pins 5 keys



Customizable with

MTASTUDIO

REVO PLUS

Customizable dial plate, front bezel and internal mask

Dimensions: 317 x 152 x 73 mm

4.3" color TFT LCD 480 x 272 pixel

3 analog gauges (optional 2 or 4 gauges)

4 push buttons and 32 telltales

PMMA front lens with antifog/mineral glass (optional)

Power supply: 12 Vdc or 24 Vdc

Protection degree: IP66 front, IP65 rear

42 inputs, 4 outputs and 1 Vref 5 Vdc output

2 CAN bus and 1 LIN interfaces, 1 analog video input

RTC, buzzer, night & day sensor

Connectors: 1 Tyco Superseal 34 pins

and 1 Tyco Superseal 26 pins



Customizable with

MTASTUDIO

Simulable with

MTACORE
SIMULATOR

IDEA

- Customizable dial plate
- Dimensions: 294 x 142 x 45.6 mm
- 7" color TFT LCD 800 x 480 pixel x 16.7M colors with optical bonding
- Portrait or landscape
- Front glass with anti-glare, anti-reflection, anti-fingerprint and anti-scratch treatments
- 4 push buttons and 18 telltales
- Power supply: 12 Vdc (9-16 Vdc) and 24 Vdc (18-32 Vdc)
- Protection degree: IP66
- 18 inputs, 5 outputs and 1 Vref 5 Vdc output
- 2 CAN bus and 1 LIN interfaces, 1 analog video input
- RTC, internal buzzer, ambient light sensor
- Connectors: 1 Tyco Superseal 34 pins, 1 video input



Customizable with
MTASTUDIO®

Simulable with
MTACORE SIMULATOR

ZIP

- Dimensions: 116 x 116 x 47 mm
- 3.5" color TFT LCD 320 x 240 pixel
- Power supply: 12 Vdc (9-16 Vdc) and 24 Vdc (18-32 Vdc)
- Protection degree: IP67
- 3 inputs
- 1 CAN bus interface
- Connector: Molex 8 pins



Customizable with
MTASTUDIO®

Simulable with
MTACORE SIMULATOR

GIOTTO

Dimensions: 240 x 145 x 45 mm

8" color TFT LCD 800 x 480 pixel x 262k colors with optical bonding

Multitouch screen (up to 10 touch points)

Front glass with anti-reflection and anti-fingerprint treatments

Power supply: 12 Vdc (8-16 Vdc) and 24 Vdc (18-32 Vdc)

Protection degree: IP66

10 inputs, 2 outputs and 1 Vref 5 Vdc output


2 CAN bus, 1 LIN, 2 USB, 2 Ethernet BroadR-Reach, 1 RS232 interfaces and 2 analog video inputs

Loudspeaker mono, RTC, ambient light sensor

Connectors: Tyco Superseal 34 pins, 2 mini BNC

Android or Linux+Qt based device

Customizable with

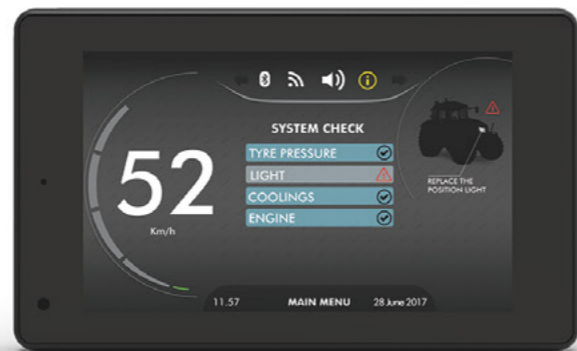

LEONARDO

Dimensions: 316 x 205 x 46 mm

12.1" color TFT LCD 1280 x 800 pixel x 262k colors with optical bonding (portrait or landscape)

Multitouch screen (up to 10 touch points)

Front glass with anti-reflection and anti-fingerprint treatments

Power supply: 12 Vdc (9-16 Vdc) and 24 Vdc (18-32 Vdc)

Protection degree: IP66

10 inputs, 2 outputs and 1 Vref 5 Vdc output

2 CAN bus, 1 LIN, 2 USB, 1 Ethernet BroadR-Reach, 1 RS232 interfaces and 2 analog video inputs

Audio OUT

Loudspeaker mono, RTC, ambient light sensor

Connectors: Tyco Superseal 34 pins, 2 mini BNC

Android or Linux+Qt based device

Customizable with



DYNA

Customizable with

MTASTUDIO

Simulable with

**MTACORE
SIMULATOR**



Universal controller for agricultural or off-highway vehicles
 System supervisor with safety features
 Dimensions: 162 x 113 x 40 mm
 (excluding fixing points and connector)
 Power supply: 12 Vdc (9-16 Vdc) and 24 Vdc (18-32 Vdc)
 Protection degree: IP67
 16 inputs, 16 outputs and 2 Vref 5 Vdc/8 Vdc outputs
 2 CAN bus and 2 LIN interfaces
 RTC
 Connector: Delphi 48 pins

ACTUA

Customizable with

MTASTUDIO

Simulable with

**MTACORE
SIMULATOR**



Universal controller for agricultural or off-highway vehicles
 System supervisor with safety features
 Dimensions: 185 x 221 x 42 mm
 (excluding fixing points and connector)
 Power supply: 12 Vdc (9-16 Vdc) and 24 Vdc (18-32 Vdc)
 Protection degree: IP67
 58 inputs, 32 outputs, 2 Vref 5 Vdc/8 Vdc outputs,
 1 Vref 15 Vdc output (at 24 Vdc) and 1 h-bridge (at 12 Vdc)
 4 CAN bus, 2 LIN, 1 USB (optional), 1 Ethernet
 BroadR-Reach (optional), 1 RS232 (optional) interfaces
 RTC (optional)
 Connector: Tyco 154 pins
 3 axis accelerometer (optional)
 External flash memory for datalogging (optional)

SOFTWARE FOR CUSTOMIZABLE DEVICES

MTA provides specific software tools developed in-house by engineers. These tools are used to program dashboards, displays and electronic control units with customizable functions.

Each customer will be able to create a “tailored” device according to his needs.

MTA **STUDIO**®

MTA **SPEEDY
CREATOR**®

android
studio 

MTA **GATE**®

MTA **CORE**®
SIMULATOR



MTA USB DONGLE

The software tools are managed using the MTA Dongle. The USB allows the end user to unlock all the MTA development and configuration tools.

Read more about MTA customizable solutions on www.mta.it/en/programming-tools



MTA **STUDIO**®

MTA Studio is a specific tool used to program dashboards, displays and electronic control units developed with customizable functions which allow the customers to create “tailored” devices.

- Logic functions coded using graphical programming languages compliant to standard IEC 61131-3 (FBD – Function Block Diagram) or C/C++.
- HMI programmed using a WYSIWYG (What You See Is What You Get) interface: supported segment, dot matrix and TFT display technology.
- Easy to use: autocomplete helps to find variables and functions; clear graphic interface, simple application software interface: hardware is mainly managed by var to read and write.
- Integrated debugger based on XCP protocol.
- CAN bus interfaces support: J1939 transport protocols (BAM/CMDT), programmable CAN wake up and termination.
- Rich set of libraries: IEC 61131-3, odometer, hourmeter, etc.
- Real-time task management.
- Code protection using HASP USB dongle to prevent unauthorized access.
- Easy integration of external codes and libraries.



MTA Speedy Creator is a plugin developed for Android Studio (the worldwide integrated development environment for Google's Android OS). It enables the customers to easily program the displays.

- Android Studio provides a WYSIWYG (What You See Is What You Get) environment. In addition, MTA provides a set of customizable graphic components (widget libraries) to enable the developers to easily create advanced user interfaces.
- Faster development phase is guaranteed from the Android ecosystem which gives access to rich API and functionalities.
- The Android framework has been extended to provide access to all common automotive interfaces (CAN, LIN, digital input/output, analog). Vehicle data can be configured using MTA Speedy Creator, a dedicated Android Studio data modelling plugin developed by MTA.
- MTA offers 3 widget library styles, designed for agriculture, industrial and construction fields.
- Logic functions can be programmed using graphical widget or native Java languages.
- Specific customizations can be done by the customer himself or by MTA.



MTA Gate is a specific tool designed for EOL department and/or for technical service points use.

- MTA Gate allows to transfer a software generated by MTA Studio to all devices. The "Hardware Variant ID" and "Customer ID" prevent misuse and/or wrong software updates.
- Parameters setting: possibility to read and write EEPROM parameters on devices.
- Access to device services: take advantage of software application utilities such as stepper motor calibration.
- Parameters map import from MTA Studio.
- MTA Gate can be used by standard Windows GUI or command-line for EOL process automation purposes.
- MTA Gate license distribution through USB dongle.



MTA Core Simulator is a tool that allows to simulate and debug MTA Studio applications directly on the PC.

- The tool allows to develop and test the application without a real target and provides a complete debug environment.
- Hardware virtualization allows to play with the configuration without harness.
- Simulation of run time behavior.
- Real ECU software runs on PC.
- Fully integrated with MTA Studio.
- "Simulation mode" is designed to help non skilled software engineers to easily understand how the application is working.
- "Debugger mode" is designed for C programmers that need a powerful debug environment.



www.mta.it



CUSTOMIZABLE SOLUTIONS
Version 1.4
September 2022

DISCLAIMER – Products, information, drawings, specifications and reference numbers (hereafter “contents”) discussed herein are for reference purposes only. All contents herein are provided on an “as is” basis, without warranties of any kind. The contents discussed herein remain the sole and exclusive property of MTA S.p.A. and shall not be copied, translated in whole or in part without MTA S.p.A. prior written consent. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted under this document, by implication, estoppel or otherwise. Contents may be modified and changed by MTA S.p.A. without any notice. For updates or additional information about MTA products, please contact your nearest MTA office. All brand names, trademarks and registered trademarks belong to their respective owners.